



Model / DVIP-xxx

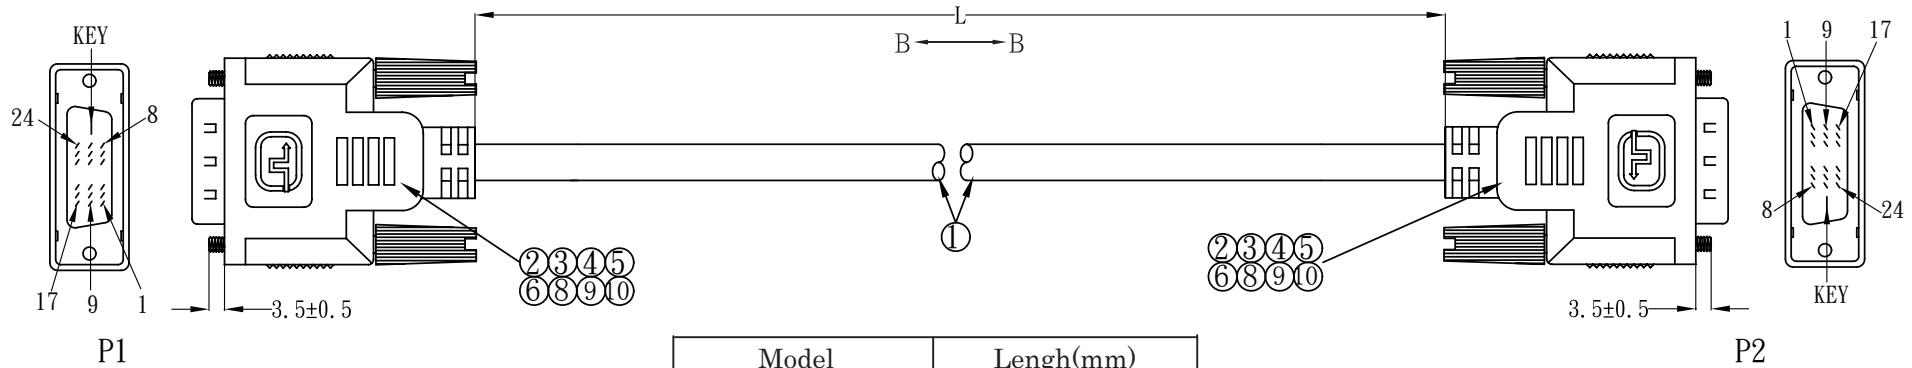

Model	Length(mm)
DVIP-015	1500 ± 50
DVIP-030	3000 ± 100
DVIP-030	5000 ± 100

SECTION: B-B

PIN ASSIGNMENTS

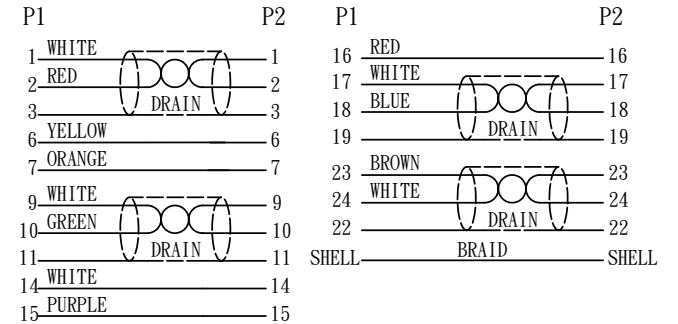

NOTE:

- 100% OPEN, SHORT & MISWIRE TEST.
- PAY ATTENTION TO PIN ASSIGNMENTS.

1	CABLE	UL 20276 (28#*1P+EAM)*4+28#*5C+AB(AL) 90% ABS 500G 60°C 48H OD:6.0MM CLR-006 BLACK	1PCS
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F	2PCS
3	CASE SHIELD	DVI SHIELD ID:7.5mm PLATED NICKEL	2PCS
4	SHELL	DVI 前鐵殼 鍍金 無印字 #1-4000-52H	2PCS
5	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK	2PCS
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ2.0mm BLACK	2PCS
7	DUST COVER	CLEAR	2PCS
8	OUTERMOLDED	DVI ID:6.8mm SHORE A 93-95 CLR-006 BLACK+2PCS SW BLACK	2PCS
9	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BLACK CLR-006	2PCS
10	COPPER-FOIL	W8*T0.04mm	2PCS

A&M Co., Ltd.

DRAW. NO		DESC.	DVI (18+1)A/M TO DVI (18+1)A/M CABLE ASS'Y	
DEPARTMENT	RD	DRAW	DATE	
SCALE	NONE	CHECK	DATE	
UNIT	mm	APPROVED	SHEET	1 OF 1

Material	Part Number	Note	***	3RD	UNIT	mm	APPROVED	SHEET	1 OF 1
----------	-------------	------	-----	-----	------	----	----------	-------	--------