



# Model / DVIP-xxx

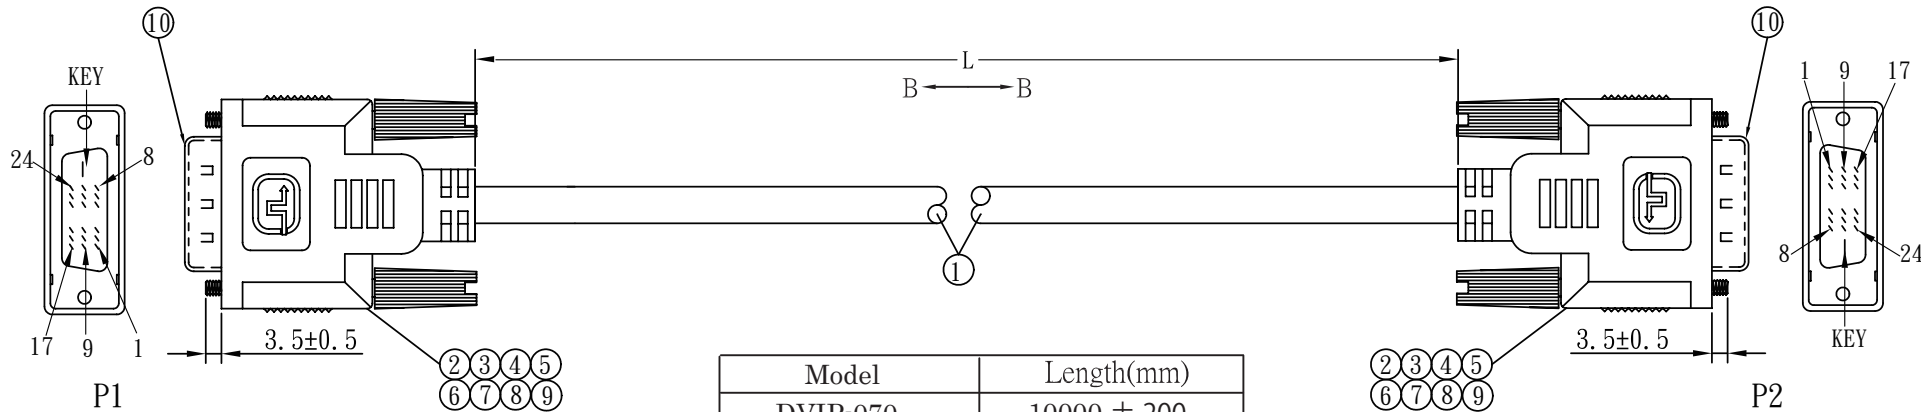

Model	Length(mm)
DVIP-070	10000 ± 200
DVIP-100	10000 ± 200
DVIP-150	15000 ± 200
DVIP-200	20000 ± 200
DVIP-300	30000 ± 200

SECTION:B-B

## PIN ASSIGNMENTS

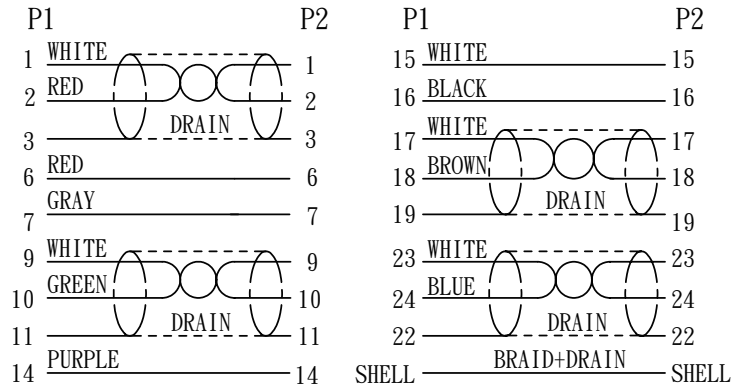

- NOTES:
1. 100%OPEN, SHORT & MISWIRE TEST.
  2. PAY ATTENTION TO PIN ASSIGNMENTS.
  3. DC 500V 1Ω 50MΩ

1	CABLE	UL 20276 (24AWG*1P+AMD) *4P+24AWG*5C+AMB85% OD : 9.5mm CLR-006 黑色	1PCS
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F	2PCS
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL	2PCS
4	SHELL	DVI 前鐵殼 鍍金 無印字 #1-4000-52H	2PCS
5	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK	2PCS
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK	2PCS
7	OUTERMOLDED	DVI ID:10mm SHORE 95+ CLR-006	2PCS
8	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BLACK	2PCS
9	COPPER-FOIL	W8*T0.04mm	2PCS

# A&M Co., Ltd.

DRAW. NO	DESC.	DVI (18+1)A/M TO DVI (18+1)A/M CABLE ASS'Y	
DEPARTMENT	RD	DRAW	DATE
SCALE	NONE	CHECK	DATE

Material	Part Number	Note	***	3RD	UNIT	mm	APPROVED	SHEET	1 OF 1
1	2	3	4	5	6	7	8	9	10