
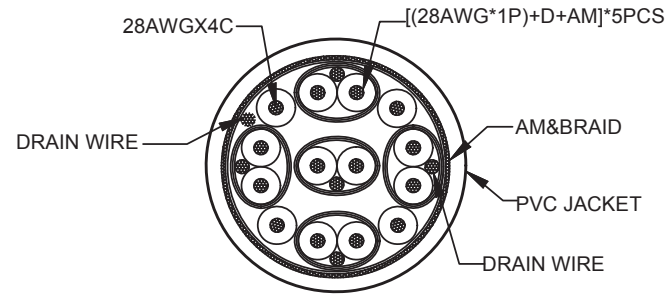


Model / DVIP-100S

DATE	REV.	REVISION	DRAFTING	CHECKED
2020.8.12	1.0	NEW		CQ

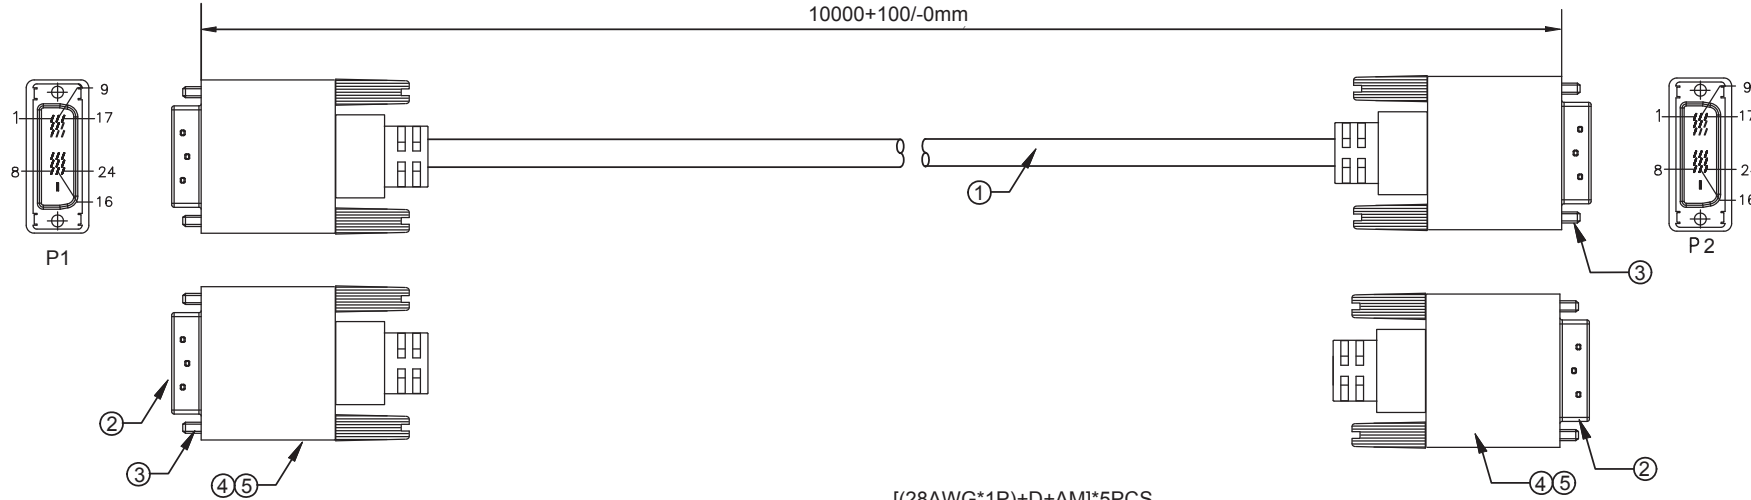

Printing:High Speed Cable 20276 80 °C 30V VW-1

NOTES:

1.Testing Condition:

100% Open/Short/Miss Wire Testing
Insulation Resistance: DC250V/0.01S,10MΩ Min,
Withstand Voltage: AC250V 5mA FOR 0.1S
Conductor Resistance:5Ω Max.

2. All Material Meet The RoHS Compliant.

3. Function Test: PC TEST PASS 1080P PASS

Pin Assignment

P1	Signal Name	P2	Signal Name
2	TMDS Data2+	2	TMDS Data2+
1	TMDS Data2-	1	TMDS Data2-
3	TMDS Data2 Shield	3	TMDS Data2 Shield
10	TMDS Data1+	10	TMDS Data1+
9	TMDS Data1-	9	TMDS Data1-
11	TMDS Data1 Shield	11	TMDS Data1 Shield
18	TMDS Data0+	18	TMDS Data0+
17	TMDS Data0-	17	TMDS Data0-
19	TMDS Data0 Shield	19	TMDS Data0 Shield
23	TMDS Clock+	23	TMDS Clock+
24	TMDS Clock-	24	TMDS Clock-
22	TMDS Clock Shield	22	TMDS Clock Shield
N.C.	CEC	N.C.	CEC
N.C.	Reserved	N.C.	Reserved
16	Hot Plug Detect	16	Hot Plug Detect
15	DDC/CEC Ground	15	DDC/CEC Ground
6	SCL	6	SCL
7	DDC Data	7	DDC Data
14	+5V Power	14	+5V Power
Shell	Shield	Shell	Shield

No.	TITLE	DESCRIPTION	Q' TY
⑤	Overmold	Black PVC	A/R
④	Innrmold	MG70 LDPE,Color:Transparent	A/R
③	SCREW	#4-40 UNC,HOOD MOLDED:BLACK PVC	4 Pcs
②	CONN	DVI(18+1)MALE,GOLD PLATED PIN,GOLD PLATED SHELL	2 Set
①	CABLE	HDMI CABLE (1/0.32B*1P+D+AL+HM)*5C+1/0.32B*4C+ADB16/10/0.12AL+AM+PVC OD:7.0±0.2mm COLOR:BLACK	A/R

Material	Part Number	Note	***	3RD
----------	-------------	------	-----	-----

A&M Co., Ltd.

DRAW. NO	GF-S120181	DESC.	HDMI A/M TO DVI CABLE ASS'Y		
DEPARTMENT	RD	DRAW		DATE	2020. 8. 12
SCALE	NONE	CHECK		DATE	2020. 8. 12
UNIT	mm	APPROVED	CQ	SHEET	1 OF 1